



INTERCONNECTING DOORSET - SAS52 (single leaf)

TIMBER FIRE-RATED
AND ACOUSTIC DOORSETS

DOOR LEAF

- 2 x CLUB 39 EI30 - 41dB doorset back to back
- Huet solid timber core
- Thickness: 40mm hardwood stiles all round

LIPPINGS

- Hardwood
- Concealed or exposed rebated lippings

DOOR FRAME

- Hardwood
- Rebated monoblock frame
- Variety of widths
- Frame can be lacquered, stained or varnished
- Frame can be wrapped with wood veneer to match door leaf facings

CHOICE OF DOOR FACINGS

- Primed
- Wood veneers
- Laminated
- White paint finish + other colour available by request
- Grooved to a wide choice of standard and bespoke finishes

IRONMONGERY

- 3 or 4 lift-off hinges - 140 x 70mm mild or stainless steel
- Cut-outs/mortices are available to suit a variety of locks and handles

PERIMETER SEALS

- Intumescent seals factory fitted (within the frame or leaf)
- Combined smoke and acoustic seals fitted within the frame and leaf
- Flat threshold 35 x 12mm



55dB CSTB 31629



EI30 (FD30)
(EITHER SIDE)




Smoke Seal (S_a Classification)
(EN 13501-2/ BS EN 1634-3)



INTERCONNECTING DOORSET - SAS52 (single leaf)

TIMBER FIRE-RATED AND ACOUSTIC DOORSETS

All sizes are in mm

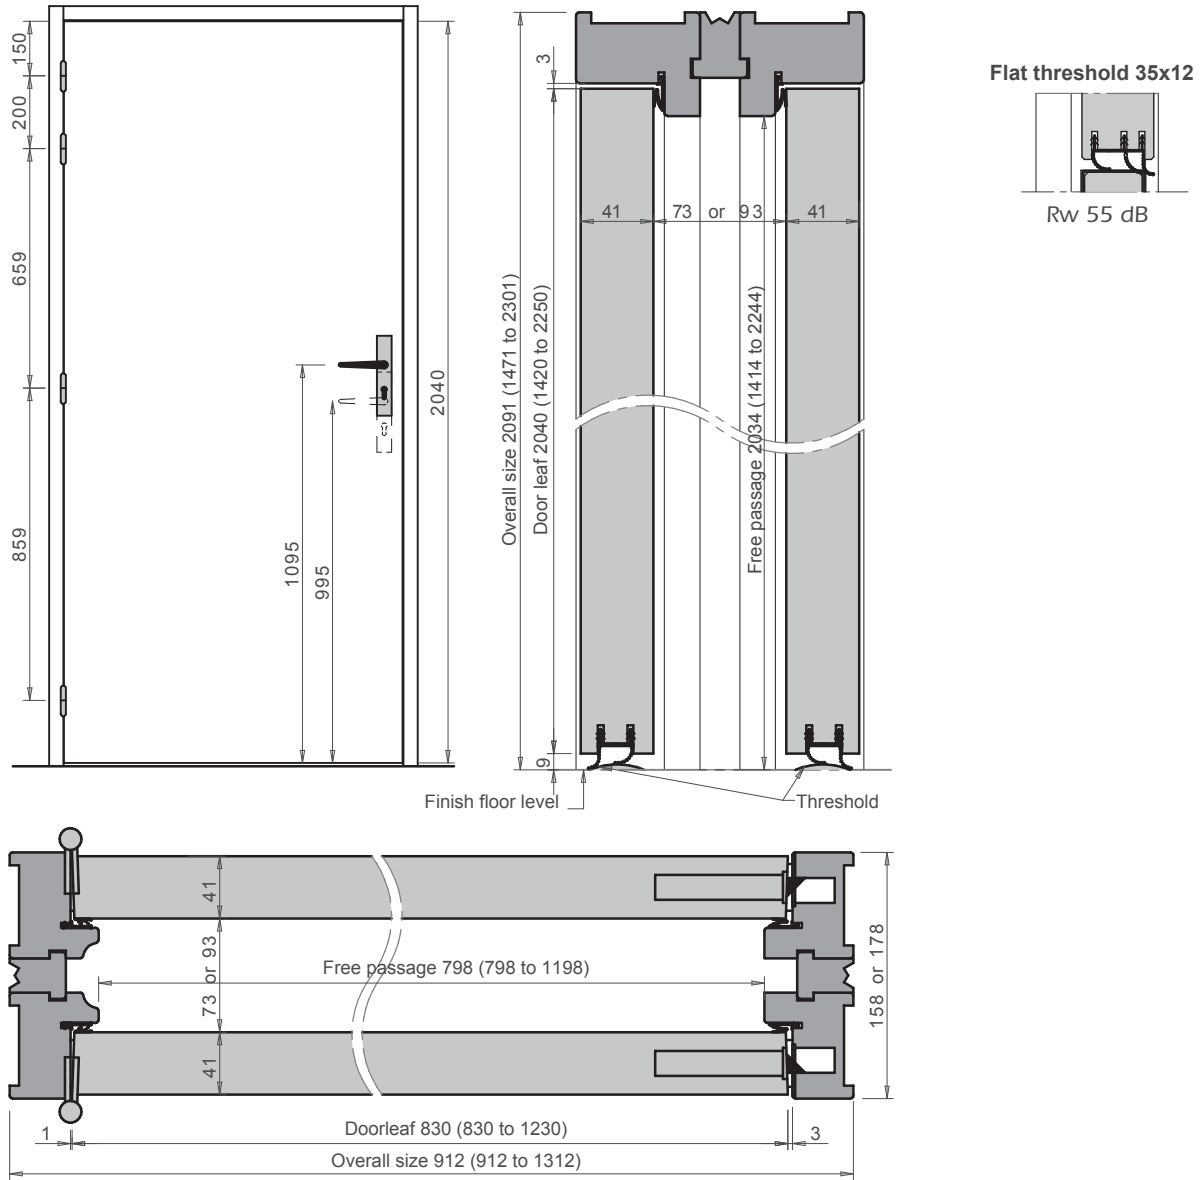

www.huet-doors.co.uk

